


LO-SF-1G-3S5-03L / LO-SF-1G-5S3-03L LO-SF-1G-3S5-03S / LO-SF-1G-5S3-03S

1.25Gbps BiDi SFP 1310/1550nm

Optical Transceiver 3km

Product Features

- SFP package with LC/SC connector
- 1310nm/1550nm FP Laser and 1550nm/1310nm PIN photodetector
- Up to 3 km transmission on SMF
- +3.3V single power supply
- LVPECL compatible data input/output interface
- Low EMI and excellent ESD protection
- Laser safety standard IEC-60825 compliant
- Compatible with RoHS

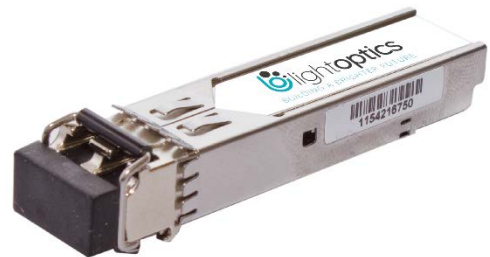

Applications

- Ethernet
- Telecom
- Fiber Channel

Ordering information

Part Number	Product Description
LO-SF-1G-3S5-03L	SFP BiDi 1.25Gbps 1310nm Tx/1550nm LC SMF DDM 3km
LO-SF-1G-5S3-03L	SFP BiDi 1.25Gbps 1550nm Tx/1310nm LC SMF DDM 3km
LO-SF-1G-3S5-03S	SFP BiDi 1.25Gbps 1310nm Tx/1550nm SC DDM SMF 3km
LO-SF-1G-5S3-03S	SFP BiDi 1.25Gbps 1550nm Tx/1310nm SC DDM SMF 3km

Absolute Maximum Ratings

Parameter	Symbol	Minimum	Maximum	Units
Storage Temperature	T _{st}	-40	85	°C
Supply Voltage	V _{cc}	0	3.6	V
Operating Relative Humidity	RH	5	95	%

Recommended Operating Conditions

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Operating Case Temperature	T _c	0	-	70	°C
Supply Voltage	V _{cc}	3.15	3.3	3.45	V
Data Rate PER Channel	-	-	1.25	-	Gb/s

Transceiver Electrical Characteristics

Transmitter							
Parameter	Symbol	Minimum	Typical	Maximum	Unit	Notes	
Input Differential Impedance	Z _{IN}	90	100	110	Ω	-	
Differential Data Input Swing	V _{IN}	500	-	2400	mV	-	
TX_FAULT	Transmitter Fault	V _{OH}	2.0	-	V _{CCHOST}	V	-
	Normal Operation	V _{OL}	0	-	0.8	V	-
TX_DISABLE	Transmitter Disable	V _{IH}	2.0	-	V _{CCHOST}	V	-
	Transmitter Enable	V _{IL}	0	-	0.8	V	-
Receiver							
Parameter	Symbol	Minimum	Typical	Maximum	Unit	Notes	
Output Differential Impedance	Z ₀	-	100	-	Ω	-	
Differential Data Output Swing	V _{OUT}	370	-	2000	mV	-	
RX_LOS	Loss of signal (LOS)	V _{OH}	2.0	-	V _{CCHOST}	V	-
	Normal Operation	V _{OL}	0	-	0.8	V	-

Transmitter Optical Characteristics


Parameter	Symbol	Minimum	Typical	Maximum	Unit	Notes
Center Wavelength Range Tx 1310	λ_c	1260	1310	1360	nm	-
Center Wavelength Range Tx 1550		1500	1550	1600		-
Spectral Width (RMS)	$\Delta\lambda$	-	-	4	nm	-
Extinction Ratio	ER	9	-	15	dB	-
Average Output Power	Po	-12	-	-6	dBm	-
Rise/Fall Time(20%-80%)	Tr/Tf	-	-	0.26	ns	-
Total jitter	Tj	-	-	0.43	UI	-
Optical Eye Diagram	IEEE 802.3z and ANSI Fibre Channel Compatible					

Receiver Optical Characteristics

Parameter	Symbol	Minimum	Typical	Maximum	Unit	Notes
Center Wavelength Rx 1550	λ_c	1500	1550	1600	nm	-
Center Wavelength Rx 1310		1260	1310	1360		-
Receiver Sensitivity	Rsen	-	-	-24	dBm	-
Receiver Overload	Rov	-3	-	-	dBm	-
Optical Return Loss	ORL	12	-	-	dB	-
LOS De-Assert	LOS _D	-	-	-24	dBm	-
LOS Assert	LOS _A	-36	-	-	dBm	-
LOS Hysteresis	-	0.5	-	5	-	-

Mechanical specifications

LC Connector:

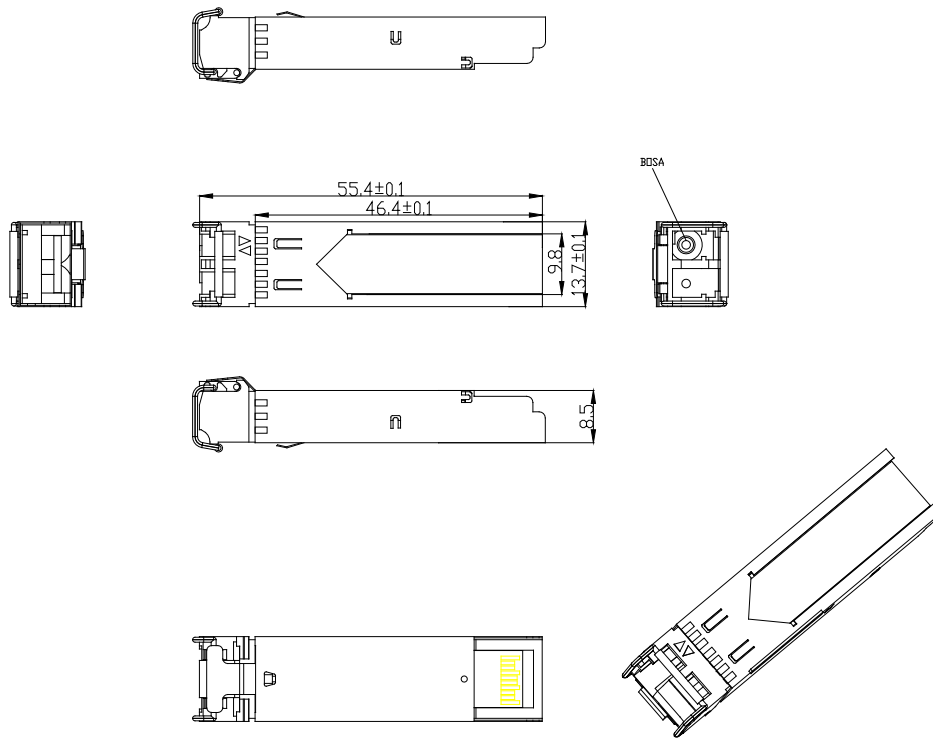

SC Connector:

